

#### Application

- Check-in
- Car wash
- Repair and maintenance
- Testing equipment

#### Approvals

- All models:  
Renault
- ML 2.35 Pv 140-200:  
Opel
- ML 2.35 Pv 160-220 xy:  
Mercedes-Benz,  
Volkswagen Group
- ML 2.35 Pv 170-240:  
BMW / Mini



# Masterlift 2.35 Pv

Electro-hydraulic twin-ram lift, 3.5 t, superstructure with flat lifting supports

## Description:

### Steel cassette:

- Waterproof steel cassette

### Hydraulic unit:

- Hard-chrome plated cylinder
- Flexible synchronization and safety system
- Corrosion-free guiding elements
- Pump unit with immersed motor
- Ecological hydraulic fluid
- Pneumatic emergency lowering
- Programmable pushbutton control unit

### Superstructure:


- Stable lifting supports, lengthwise adjustable
- Rubber-coated, non-skid pads
- Low minimum height

### Standard colours

- Pv Premium: zink coated and painted RAL 7016

Technical data	
Lifting capacity	3,500 kg
Lifting height	1,950 mm
Working height	2,015 mm + Rubber pads
Cylinder diameter	2 x 123 mm
Distance between cylinders	1,335 mm
Lifting / lowering time	app. 30 Sec.
Foundation depth	2,625 mm
Pump unit	3.0 kW
Ecological hydraulic fluid	10 l
Voltage	230/400 V - 50 Hz - 16 A

Pv superstructure	
Total width min. - max.	120 - 180: app. 1,200 - 1,800 mm 140 - 200: app. 1,400 - 2,000 mm 160 - 220: app. 1,600 - 2,200 mm 170 - 240: app. 1,700 - 2,400 mm
Min. height	65 mm

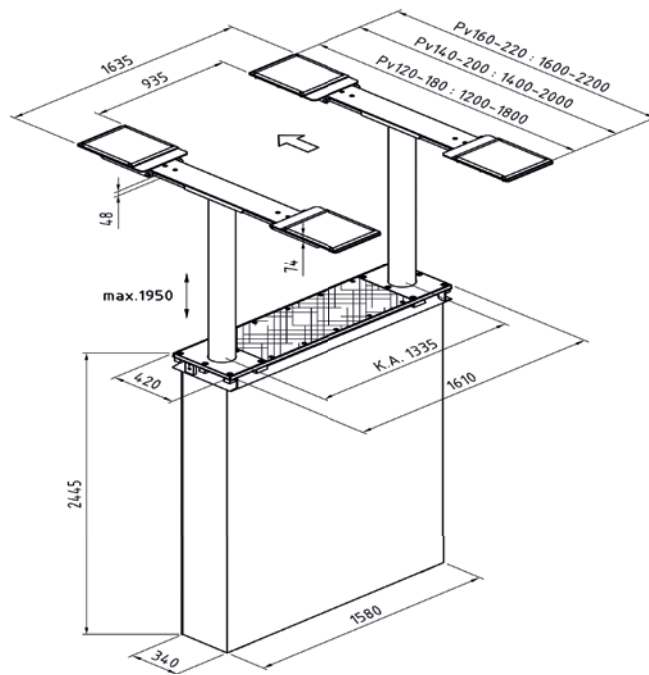

**autop Maschinenbau GmbH**  
Sandkampstraße 90  
48432 Rheine | Germany  
☎ +49 5971 8602-02  
☎ +49 5971 8602-25  
✉ info@autopstenhoj.com

**STENHOJ A/S**  
Barrit Langgade 188-190  
7150 Barrit | Denmark  
☎ +45 76821-330  
☎ +45 76821-331  
✉ info@autopstenhoj.com

**Versions:**

**Steel cassette:**

- Zinc-coated
- Coated
- Self-carrying

**Superstructure:**

- Lifting supports in different lengths (120-180, 140-200, 160-220 & 170-240)
- Pv Standard: Zinc-coated
- Pv Premium: zink coated and painted

**Installation:**

- Superstructure on floor
- Superstructure in floor (für 140-200 & 160-220)
- Ceiling installation

**Optional extras:**

- XY-pads
- Sets of rubber blocks, 40, 60, 80 and 100 mm

**Special colours available on request!**



Produktinformation